

Non-Gaussianity-induced Heat Conduction

Kiyoshi Kanazawa¹, Takahiro Sagawa^{1,2}, and Hisao Hayakawa¹

¹*Yukawa Institute for Theoretical Physics, Kyoto University,
Kitashirakawa-oiwake cho, Sakyo-ku, Kyoto 606-8502, Japan*

²*The Hakubi Center, Kyoto University, Yoshida-ushinomiya cho, Sakyo-ku, Kyoto 606-8302, Japan*
(Dated: September 12, 2012)

We study the properties of a Brownian motor that is driven by non-Gaussian noises from athermal environments. We find that new terms should be added to the conventional Fourier law and the fluctuation theorem for the heat current, where its average and fluctuation are determined not only by the noise intensities but also by the non-Gaussian nature of the noises. Our result explicitly shows the absence of the zeroth law of thermodynamics in athermal systems.

PACS numbers: 05.70.Ln, 05.10.Gg, 05.40.Fb

Introduction.— Recent experimental developments in single-molecule manipulation have enabled us to investigate the detailed thermodynamic properties of small systems such as colloidal and biological systems [1]. This direction of researches has shed new light on Brownian ratchets [2–14], where the average and the fluctuation of the heat current are respectively characterized by the Fourier law [15, 16] and the heat fluctuation theorem [17–26]. If the environments are in thermal equilibrium, stochastic thermodynamics with Gaussian noises is a powerful methodology [27–30] to investigate non-equilibrium thermodynamics of Brownian ratchets.

On the other hand, the effects of non-Gaussian noises from athermal environments have been reported in, for example, electrical circuits [31] and biomolecular systems [32]. The conventional approaches in stochastic thermodynamics are not straightforwardly applicable to such systems, because the environments are not in thermal equilibrium. One approach to this problem has been the use of non-Gaussian stochastic models [3, 4, 33–35]. We then raise the following question: how should the fundamental thermodynamic relations, such as the Fourier law and the fluctuation theorem, be modified in the presence of non-Gaussian noises?

Our aim in this Letter is to answer this question. On the basis of non-Gaussian stochastic energetics [36], we study a Brownian motor driven by non-Gaussian noises from two athermal environments, and derive a generalized Fourier law. The average heat current between the environments is determined not only by the difference in the noise intensities (i.e., the temperatures for the case of equilibrium environments), but also by the difference in the non-Gaussianity of the noises. In particular, even when the noise intensities of the environments are the same, the heat can be conducted purely by the effect of the non-Gaussianity. We also derive a correction to the heat fluctuation theorem, which reveals the fundamental properties of the heat fluctuations in the presence of the non-Gaussian noises. Moreover, we investigate the validity of the zeroth law of thermodynamics for athermal systems, and find that the zeroth law is not universally valid

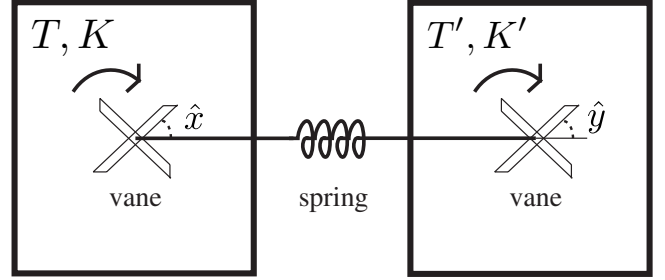


FIG. 1: A schematic picture of the non-equilibrium Brownian motor. The noise from the left (right) environment is characterized by the noise intensity T (T') and the fourth-order cumulant K (K'). K and K' characterize the non-Gaussianity of the noises.

but depends on the details of a contact device between two systems. We numerically verify our result, which demonstrates that the direction of the average heat current depends on the non-Gaussianity of the noises, and that the properties of the heat fluctuation significantly deviates from those of the conventional heat fluctuation theorem. Our result would serve as a theoretical foundation to study the energy transport and the irreversible phenomena in athermal systems such as electrical circuits and biological systems.

Model.— We consider a non-Gaussian stochastic model of a Brownian motor which consists of two vanes that are attached to two athermal environments by a spring (see Fig. 1). The vanes are driven by athermal fluctuations in the environments, and the spring conducts an energy current induced by the fluctuations. We refer to the energy current as the heat current. The motion of the vanes is described by the following Langevin equations:

$$\frac{d\hat{x}}{dt} = -\frac{\partial U}{\partial x}(\hat{x}, \hat{y}) + \hat{\xi}, \quad (1)$$

$$\frac{d\hat{y}}{dt} = -\frac{\partial U}{\partial y}(\hat{x}, \hat{y}) + \hat{\eta}, \quad (2)$$

where $\hat{x}, \hat{y}$ are the angles of the vanes, $U(\hat{x}, \hat{y})$ is the dimensionless potential energy of the spring, and $\hat{\xi}, \hat{\eta}$

are independent white non-Gaussian noises that characterize the fluctuations from the athermal environments. In the following, $\langle \hat{A} \rangle$ denotes the ensemble average of a stochastic variable $\hat{A}$, and the Boltzmann constant is taken to be unity. The first, second, and the fourth cumulants of the noises are given by $\langle \hat{\xi}(t) \rangle = \langle \hat{\eta}(t) \rangle = 0$, $\langle \hat{\xi}(t_1) \hat{\xi}(t_2) \rangle = 2T\delta(t_1 - t_2)$, $\langle \hat{\eta}(t_1) \hat{\eta}(t_2) \rangle = 2T'\delta(t_1 - t_2)$, $\langle \hat{\xi}(t_1) \hat{\xi}(t_2) \hat{\xi}(t_3) \hat{\xi}(t_4) \rangle_c = K\delta_4(t_1, t_2, t_3, t_4)$, and $\langle \hat{\eta}(t_1) \hat{\eta}(t_2) \hat{\eta}(t_3) \hat{\eta}(t_4) \rangle_c = K'\delta_4(t_1, t_2, t_3, t_4)$, where $\langle \hat{\xi}(t_1) \dots \hat{\xi}(t_n) \rangle_c$ denotes a n -th order cumulant and $\delta_n(t_1, \dots, t_n)$ is a n -point delta function with an positive integer n [44]. In the following arguments, the cumulants $\langle \hat{\xi}(t_1) \dots \hat{\xi}(t_n) \rangle_c$ with $n = 3$ and $n \geq 5$ do not contribute to our result. On the basis of stochastic energetics [27–30, 36], the heat current is defined by

$$\frac{d\hat{Q}}{dt} = \left(-\frac{d\hat{x}}{dt} + \hat{\xi} \right) * \frac{d\hat{x}}{dt}, \quad (3)$$

where $*$ describes a stochastic integral that is defined as a white noise limit of a colored noise. As discussed in Ref. [36] in detail, the $*$ integral for an arbitrary function $f(\hat{x}(s))$ is given by

$$\int_0^t ds \hat{\xi}(s) * f(\hat{x}(s)) \equiv \lim_{\varepsilon \rightarrow +0} \lim_{\Delta t \rightarrow +0} \sum_{i=0}^{N-1} \Delta t \hat{\xi}_\varepsilon(t_i) f(\hat{x}(t_i)), \quad (4)$$

where $\Delta t \equiv t/N$, $t_i \equiv i\Delta t$, and $\hat{\xi}_\varepsilon(t_i)$ is the colored noise with a correlation time $\varepsilon > 0$ such that $\lim_{\varepsilon \rightarrow 0} \hat{\xi}_\varepsilon(t_i) = \hat{\xi}(t_i)$. For non-Gaussian noises, the definition of the heat is not consistent with the Stratonovich integral but with the $*$ integral [36]. We note that the Stratonovich and $*$ integrals are the same for Gaussian noises. In the case of $K = K' = 0$, we can show that the motor obeys the conventional Fourier law and the heat fluctuation theorem:

$$J = \kappa \Delta T, \quad (5)$$

$$\lim_{t \rightarrow \infty} \frac{1}{t} \ln \frac{P(\hat{Q}(t) = +qt)}{P(\hat{Q}(t) = -qt)} = \Delta \beta q, \quad (6)$$

where $J = \langle d\hat{Q}/dt \rangle_{ss} \equiv \lim_{t \rightarrow \infty} \langle d\hat{Q}/dt \rangle$ is the average heat current in the steady state, κ is the thermal conductivity, $\Delta T \equiv T - T'$, $\Delta \beta \equiv 1/T - 1/T'$, and q is the time average heat current.

Generalized Fourier's law. – We now discuss the generalized Fourier law in the case of a non-harmonic spring potential $U(\hat{x}, \hat{y}) = (1/2)(\hat{x} - \hat{y})^2 + (\epsilon/4)(\hat{x} - \hat{y})^4$, where ϵ is a small positive number. By using the first order perturbation in terms of ϵ , we obtain the generalized Fourier law:

$$J = \kappa \Delta T + \kappa' \Delta K, \quad (7)$$

where $\kappa \equiv (1/2)[1 + \{3\epsilon(T + T')/2\}]$, $\kappa' \equiv \epsilon/8$, and $\Delta K \equiv K - K'$. This is the first main result of this

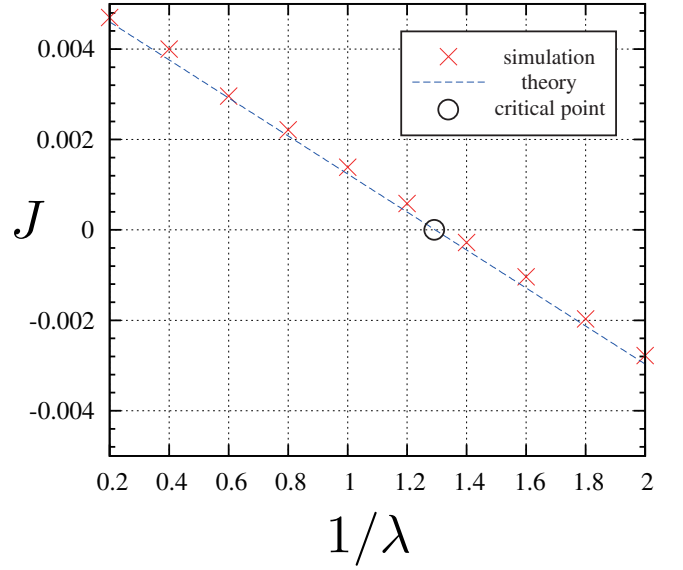


FIG. 2: (Color online) The numerical verification of Eq. (7). The dashed line is theoretically obtained from Eq. (7), the cross points show the numerical data of our Monte Carlo simulation, and the open circle is the point at which the heat current is switched. As the non-Gaussian property $1/\lambda$ becomes larger, the heat current becomes smaller. We assume the ergodic property for the system $\langle d\hat{Q}/dt \rangle_{ss} = \lim_{T \rightarrow \infty} [1/T \int_0^T ds (d\hat{Q}/dt)]$ and calculated the long time average instead of the ensemble average. The time step is given by 0.001 and the entire time interval for the average is 5×10^7 . The limit $1/\lambda \rightarrow +0$ is the Gaussian limit.

Letter, which will be shown later. The first term on the right hand side (rhs) of Eq. (7) corresponds to the conventional Fourier law, and the second term describes the correction term due to the non-Gaussianity of the noises. This result implies that the heat is conducted from the environment with the higher non-Gaussianity to the other environment. We note that, if the potential is harmonic with $\epsilon = 0$, the effect of the non-Gaussianity vanishes in Eq. (7).

We numerically demonstrate the validity of Eq. (7). For simplicity, we assume that $\hat{\xi}(t)$ is a white Gaussian noise and that $\hat{\eta}(t)$ is a two-sided Poisson noise with intensities $\pm I$ and a transition rate $\lambda/2$:

$$\hat{\eta}(t) = \sum_i I \delta(t - \hat{t}_i) + \sum_i (-I) \delta(t - \hat{s}_i), \quad (8)$$

where $\hat{t}_i, \hat{s}_i$ are times at which Poisson flights happen. Figure 2 shows our numerical results with $T = 0.30$, $\Delta T = 0.01$, and $\epsilon = 0.1$. We plot the average heat current by changing $1/\lambda$. The direction of the heat current is changed at $1/\lambda^* = (\Delta T/\epsilon T^2) [1 + 3\epsilon(T + T')/2] \simeq 1.24$.

We focus on the case of $T = T'$, where ΔT on the rhs of Eq. (7) vanishes but ΔK drives the heat current. From $2T = I^2\lambda$, $K' = 4T^2/\lambda$ and $K = 0$, we obtain the

average heat current

$$J = -\frac{\epsilon T^2}{2\lambda}, \quad (9)$$

where the rhs describes the effect of the non-Gaussianity. In the limit $1/\lambda \rightarrow +0$, the non-Gaussian contribution vanishes, because the Poisson noise converges to the Gaussian noise due to the central limit theorem.

Correction to the heat fluctuation theorem.— We next discuss a correction term to the conventional heat fluctuation theorem on the basis of the perturbative expansion in terms of q , $\Delta\beta$, K and K' . We assume that these four quantities are proportional to a small positive parameter δ . To make the problem simpler, we consider the case of a harmonic potential with $\epsilon = 0$. We obtain a correction term to the heat fluctuation theorem up to the third order perturbation in terms of δ :

$$\lim_{t \rightarrow \infty} \frac{1}{t} \ln \frac{P(\hat{Q}(t) = +qt)}{P(\hat{Q}(t) = -qt)} = q\Delta\beta \left(1 - \frac{K + K'}{16T^2} \right), \quad (10)$$

which will be shown later. This is the second main result of this Letter. Although the conventional Fourier law (5) holds for a harmonic potential with $\epsilon = 0$, the conventional heat fluctuation theorem (6) should be modified as Eq. (10) even for the harmonic potential, which implies that the effect of the non-Gaussianity appears only in the higher cumulants in this case.

We also numerically checked the validity of Eq. (10) by using the two-sided Poisson model (8), as shown in Fig. 3. By taking $t = 1000$, $1/\lambda = 0.5$, $T = 0.20$, and $\Delta T = 0.01$, we numerically obtain the fluctuation function $f(q) \equiv \lim_{t \rightarrow \infty} (1/t) \ln P(Q(t) = +qt)/P(Q(t) = -qt)$ and compare it with Eqs. (10) and (6). We observe a significant deviation from the conventional heat fluctuation theorem (6), and the deviation is consistent with our result (10).

The zeroth law of thermodynamics.— We next discuss the zeroth law of thermodynamics [37–39]. In the case of non-Gaussian noises with $\Delta K \neq 0$, Eq. (7) implies that the condition of $J = 0$ depends on the potential shape of the spring characterized by ϵ . In contrast, in the case of Gaussian noises, $J = 0$ if and only if $\Delta T = 0$. Therefore, the zeroth law of thermodynamics is not universally valid for non-Gaussian noises; the condition of $J = 0$ depends on the details of the contact device (i.e., the spring). When we fix the contact device, however, the transitivity of equilibration holds and we can introduce an indicator characterizing the direction of heat current. We note that a similar observation was reported for driven lattice gas systems [40, 41]. To show this, we consider three athermal environments, AE_1 , AE_2 and AE_3 , whose fluctuations are characterized by the second and forth order cumulants (T_i, K_i) with $i = 1, 2, 3$. If we link the contact device between AE_i and AE_j ($i, j = 1, 2, 3$, $i \neq j$), the average heat current between them is given by $J_{ij} = \kappa_{ij}\Delta_{ij}T + \kappa'_{ij}\Delta_{ij}K$, where

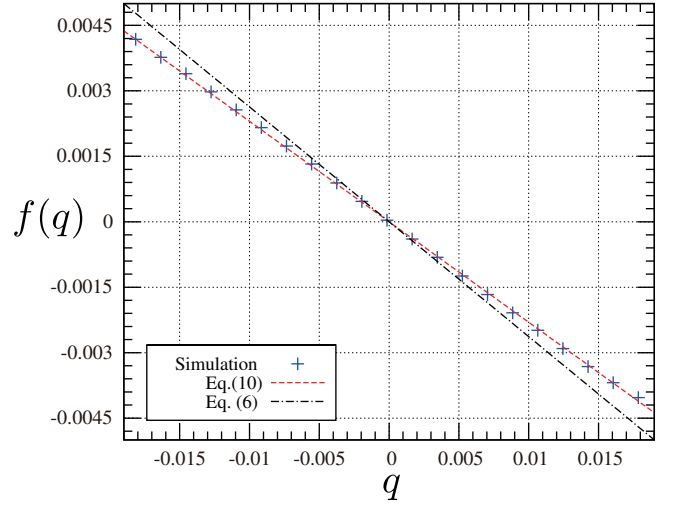


FIG. 3: (Color online) The numerical verification of Eq. (10). The red broken line is obtained from the generalized fluctuation theorem (10), the black chain line is obtained from the conventional fluctuation theorem (6), and the blue cross points show the numerical data of our simulation. We adopted the Monte Carlo method to make the histogram of the heat distribution function, and obtain the numerical data of the fluctuation function $f(q)$. The bin-width for the heat histogram is 0.0001, the time step is 0.0002, and the number of samples in the Monte Carlo is 5×10^7 . Due to the large cost for the calculation, the numerical data of $f(q)$ is restricted to $|q| < 0.2$.

$\kappa_{ij} \equiv (1/2)[1 + \{3\epsilon(T_i + T_j)/2\}]$, $\kappa'_{ij} \equiv \epsilon/8$, $\Delta_{ij}T \equiv T_i - T_j$ and $\Delta_{ij}K \equiv K_i - K_j$. We can then easily show the transitivity of equilibration: if $J_{12} = 0$ and $J_{23} = 0$, then $J_{13} = 0$. We also introduce a device-dependent indicator $\mu_\epsilon(T, K)$ as

$$\mu_\epsilon(T, K) = \frac{1}{2}T + \frac{3\epsilon}{4}T^2 + \frac{\epsilon}{8}K, \quad (11)$$

which characterizes the direction of the average heat current $J_{ij} = \mu_\epsilon(T_i, K_i) - \mu_\epsilon(T_j, K_j)$. In this sense, $\mu_\epsilon(T_i, K_i)$ plays a similar role to that of the temperature in equilibrium thermodynamics.

Derivations of the main results.— We now prove Eq. (7). By introducing a new variable $\hat{z} \equiv \hat{x} - \hat{y}$, Eqs. (1) and (2) reduce to a single equation:

$$\frac{d\hat{z}}{dt} = -2\hat{z} - 2\epsilon\hat{z}^3 + \hat{\xi} - \hat{\eta}. \quad (12)$$

For small ϵ , the solution of Eq. (12) can be expanded as $\hat{z} = \hat{z}_0 + \epsilon\hat{z}_1 + O(\epsilon^2)$, where $\hat{z}_0(t) = \int_0^t ds e^{-2(t-s)} (\hat{\xi}(s) - \hat{\eta}(s))$ and $\hat{z}_1(t) = -2 \int_0^t ds e^{-2(t-s)} \hat{z}_0^3(s)$. By a straightforward calculation, we obtain $\langle \hat{z}^2 \rangle_{SS} = (T + T')/2 - 3\epsilon(T + T')^2/4 - \epsilon(K + K')/8 + O(\epsilon^2)$, $\langle \hat{z}^4 \rangle_{SS} = 3(T + T')^2/4 + (K + K')/8 + O(\epsilon)$, $\langle \hat{z} * \hat{\xi} \rangle_{SS} = T + O(\epsilon^2)$, and $\langle \hat{z}^3 * \hat{\xi} \rangle_{SS} = 3T(T + T')/2 + K/4 + O(\epsilon)$. The

corresponding stochastic heat current is given by $d\hat{Q}/dt = -\hat{z}^2 - 2\epsilon\hat{z}^4 + \hat{z} * \hat{\xi} + \epsilon\hat{z}^3 * \hat{\xi} + O(\epsilon^2)$. We then obtain

$$J = -\langle \hat{z}^2 \rangle_{\text{ss}} - 2\epsilon \langle \hat{z}^4 \rangle_{\text{ss}} + \langle \hat{z} * \hat{\xi} \rangle_{\text{ss}} + \epsilon \langle \hat{z}^3 * \hat{\xi} \rangle_{\text{ss}} \quad (13)$$

$$= \frac{1}{2} \left[1 + \frac{3\epsilon(T + T')}{2} \right] \Delta T + \frac{\epsilon}{8} \Delta K, \quad (14)$$

which implies Eq. (7).

To derive the generalized heat fluctuation theorem (10), we set $\epsilon = 0$ and consider the large deviation principle [42, 43]

$$\lim_{t \rightarrow +\infty} \frac{1}{t} \ln P(\hat{Q}(t) = qt) = v^* q + \Psi(v^*), \quad (15)$$

where $\Psi(v) \equiv \lim_{t \rightarrow +\infty} \ln \langle e^{-v\hat{Q}(t)} \rangle / t$ is the cumulant generating function, and v^* is the point at which $vq + \Psi(v)$ takes the minimum. For the Gaussian noise, the cumulant generating function is exactly given by [43]

$$\Psi_0(v) = 1 - \sqrt{(1 - Tv)(1 + T'v)}. \quad (16)$$

For the non-Gaussian noises, the cumulant generating function can be expanded as $\Psi(v) = \Psi_0(v) + \Psi_1(v) + O(\delta^2)$, where $\Psi_1(v)$ is the order of δ . By a straightforward calculation, we obtain the variance of the heat flux $\sigma^2(t) \equiv \langle (\hat{Q}(t) - \langle \hat{Q}(t) \rangle)^2 \rangle / t^2 = (T + T')^2 / 4t + (K + K') / 16t + O(t^{-2})$, where $\hat{Q}(t) = \int_0^t ds \left(-\hat{z}^2(s) + \hat{z}(s) * \hat{\xi}(s) \right)$ and $\hat{z}(t) = \hat{z}_0(t)$ in the case of $\epsilon = 0$. We then obtain

$$\Psi_1(v) = \frac{K + K'}{16} \frac{v^2}{2} + O(\delta v^3), \quad (17)$$

where we consider up to the second order term of v because v^* is the order of δ . From Eqs. (15), (16), and (17), we obtain

$$\lim_{t \rightarrow \infty} \frac{1}{t} \ln P(\hat{Q}(t) = qt) = -\frac{q^2 + q\Delta T + \Delta T^2 / 4}{2TT' + (K + K')/8} + O(\delta^4), \quad (18)$$

which implies the generalized fluctuation theorem (10).

Conclusion and discussion.— In this Letter, we have studied a Brownian motor driven by non-Gaussian noises from two athermal environments. As a result, we found new additional terms in the Fourier law and the heat fluctuation theorem, which implies that the heat current can be induced by the non-Gaussianity of athermal fluctuations. We also discussed that the zeroth law of thermodynamics is not universally valid for athermal systems. Our numerical results are not consistent with the conventional Fourier law and the fluctuation theorem, but consistent with our analytical results obtained in this Letter. Our results would open up an extension of nonequilibrium thermodynamics to athermal systems with non-Gaussian noises. Our theory can be experimentally tested in electric circuits and biological systems driven by the Poisson noises [31, 32].

We are grateful to K. Sekimoto, K. Kawaguchi, T. Nemoto and S. Ito for valuable discussions. Part of the numerical calculations were carried out on SR16000 at YITP in Kyoto University. This work was supported by the Grants-in-Aid for Japan Society for Promotion of Science (JSPS) Fellows (Grant No. 24-3751), the Grant-in-Aid for Research Activity Start-up (Grant No. 11025807) and the Global COE Program, “The Next Generation of Physics, Spun from Universality and Emergence” from the Ministry of Education, Culture, Sports, Science and Technology (MEXT) of Japan.

SUPPLEMENTARY INFORMATION: CUMULANT FUNCTIONAL AND n -POINT DELTA FUNCTIONS

Here we discuss the relationship between a cumulant functional of the non-Gaussian noise $\hat{\xi}(t)$ and a n -points delta function. A cumulant functional $\Phi[v]$ and a n -th order cumulant $\langle \hat{\xi}(t_1) \dots \hat{\xi}(t_n) \rangle_c$ [45] are respectively introduced as

$$\Phi[v] \equiv \ln \langle e^{i \int_0^t ds \hat{\xi}(s)v(s)} \rangle, \quad (19)$$

$$\langle \hat{\xi}(t_1) \dots \hat{\xi}(t_n) \rangle_c \equiv \left. \frac{\delta^n \Phi[v]}{\delta i v(t_1) \dots \delta i v(t_n)} \right|_{v=0}, \quad (20)$$

where $v(s)$ is an arbitrary function. According to the Itô-Lévy decomposition [46, 47], the cumulant functional can be transformed into the standard form of Lévy processes

$$\Phi[v] = \int_0^t ds \left[iav(s) - \frac{\sigma^2 v^2(s)}{2} + \int_{-\infty}^{+\infty} dz \left(e^{iv(s)z} - 1 \right) w(z) \right], \quad (21)$$

where a and σ^2 are arbitrary constants, $w(z)$ is a transition rate function. We next introduce the n -points delta function as

$$\delta_n(t_1, \dots, t_n) = \begin{cases} \infty & (t_1 = \dots = t_n) \\ 0 & (\text{else}) \end{cases}, \quad (22)$$

$$\int_{-\infty}^{\infty} dt_2 \dots dt_n \delta_n(t_1, \dots, t_n) = 1. \quad (23)$$

We assume the symmetric property for the delta function $\delta_n(t_1, \dots, t_n) = \delta_n(s_1, \dots, s_n)$, where $\{s_1, \dots, s_n\}$ is an arbitrary permutation of $\{t_1, \dots, t_n\}$. The following equality is crucial to derive Eqs. (7) and (10) of the main text:

$$\int_0^t dt_2 \dots dt_n \delta_n(t, t_2, \dots, t_n) = \frac{1}{n}. \quad (24)$$

The derivation of this equality is as follows. By definition, we obtain

$$\int_0^t dt_1 \dots dt_n \delta_n(t_1, \dots, t_n) = t. \quad (25)$$

By differentiating the left and right hand side around t , we obtain

$$\int_0^t dt_2 \dots dt_n \delta_n(t, t_2, t_3, \dots, t_n) + \quad (26)$$

$$+ \int_0^t dt_1 dt_3 \dots dt_n \delta_n(t_1, t, t_3, \dots, t_n) + \dots \quad (27)$$

$$+ \int_0^t dt_1 \dots dt_{n-1} \delta_n(t_1, t_2, \dots, t) = 1. \quad (28)$$

The symmetric property of the delta function leads to the following equality

$$n \int_0^t dt_2 \dots dt_n \delta_n(t, t_2, \dots, t_n) = 1, \quad (29)$$

which implies Eq. (24). We can represent the functional derivatives of the cumulant functional with the n -points delta functions:

$$\left. \frac{\delta^2 \Phi[v]}{\delta \text{iv}(t_1) \delta \text{iv}(t_2)} \right|_{v=0} = 2T \delta_2(t_1, t_2), \quad (30)$$

$$\left. \frac{\delta^4 \Phi[v]}{\delta \text{iv}(t_1) \delta \text{iv}(t_2) \delta \text{iv}(t_3) \delta \text{iv}(t_4)} \right|_{v=0} = K_4 \delta_4(t_1, t_2, t_3, t_4), \quad (31)$$

where the second and fourth order cumulants are respectively introduced as $2T \equiv \sigma^2 + \int z^2 w(z) dz$ and $K \equiv \int z^4 w(z) dz$. We note that the assumption of the symmetry of the delta function is consistent with that of the mixed functional derivative

$$\left. \frac{\delta^n \Phi[v]}{\delta \text{iv}(t_1) \dots \delta \text{iv}(t_n)} \right|_{v=0} = \left. \frac{\delta^n \Phi[v]}{\delta \text{iv}(s_1) \dots \delta \text{iv}(s_n)} \right|_{v=0}. \quad (32)$$

-
- [1] C. Bustamante, J. Liphardt, and F. Ritort, *Phys. Today* **58**, No. 7, 43 (2005).
[2] M. O. Magnasco, *Phys. Rev. Lett.* **71**, 1477 (1993).
[3] P. Reimann, *Phys. Rep.* **361**, 57 (2002).
[4] J. Luczka, T. Czernik, and P. Hanggi, *Phys. Rev. E* **56**, 3968 (1997).
[5] C. Jarzynski and O. Mazonka, *Phys. Rev. E* **59**, 6448 (1999).
[6] J. A. S. Jeffrey T. Finer, Robert M. Simmons, *Nature* **368**, 113 (1994).
[7] A. D. Mehta *et al*, *Science* **283**, 1689 (1999).
[8] Y. Ishii, *Single Moll* **1**, 5 (2000).
[9] V. Blicke, T. Speck, L. Helden, U. Seifert, and C. Bechinger, *Phys. Rev. Lett.* **96**, 070603 (2006).
[10] V. Serreli, C.-F. Lee, E. R. Kay, and D. a Leigh, *Nature* **445**, 523 (2007).
[11] T. Sagawa and M. Ueda, *Phys. Rev. Lett.* **104**, 090602 (2010).
[12] S. Toyabe, T. Sagawa, M. Ueda, E. Muneyuki, and M. Sano, *Nature Phys.* **6**, 988 (2010).
[13] M. Bauer, D. Abreu, and U. Seifert, *J. Phys. A* **45**, 162001 (2012).
[14] D. Mandal and C. Jarzynski, *Proc. Nat. Acad. Sci. USA* **109**, 11641 (2012).
[15] F. Bonetto, J. L. Lebowitz, and L. Rey-Bellet, in *Mathematical Physics 2000*, edited by A. Fokas *et al.* (Imperial College Press, London, 2000), p. 128.
[16] R. Kubo, M. Toda, and N. Hashitsume, *Statistical Physics II: Nonequilibrium Statistical Mechanics* (Springer-Verlag, Berlin, 1991), 2nd ed.
[17] D. J. Evans, E. G. D. Cohen, and G. P. Morriss, *Phys. Rev. Lett.* **71**, 2401 (1993).
[18] J. L. Lebowitz and H. Spohn, *J. Stat. Phys.* **95**, 333 (1999).
[19] G. E. Crooks, *Phys. Rev. E* **60**, 2721 (1999).
[20] C. Jarzynski and D. K. Wójcik, *Phys. Rev. Lett.* **92**, 230602 (2004).
[21] J. Kurchan, *J. Phys. A* **31**, 3719 (1998).
[22] U. Seifert, *Phys. Rev. Lett.* **95**, 040602 (2005).
[23] R. van Zon and E. G. D. Cohen, *Phys. Rev. Lett.* **91**, 110601 (2003).
[24] T. Nemoto, *Phys. Rev. E* **85**, 061124 (2012).
[25] J. D. Noh and J.-M. Park, *Phys. Rev. Lett.* **108**, 240603 (2012).
[26] T. Harada and S.-i. Sasa, *Phys. Rev. Lett.* **95**, 130602 (2005).
[27] U. Seifert, *Euro. Phys. J. B.* **64**, 423 (2008).
[28] K. Sekimoto, *J. Phys. Soc. Jpn.* **66**, 1234 (1997).
[29] K. Sekimoto, *Prog. Theor. Phys. Suppl.* **130**, 17 (1998).
[30] K. Sekimoto, *Stochastic Energetics* (Springer-Verlag, Berlin, 2010).
[31] Y. M. Blanter, M. Bu, D. P. Theh, and U. D. Gene, *Phys. Rep.* **336**, 1 (2000).
[32] E. Ben-Isaac *et al.*, *Phys. Rev. Lett.* **106**, 238103 (2011).
[33] H. Touchette and E. G. D. Cohen, *Phys. Rev. E* **76**, 020101(R) (2007).
[34] A. Baule and E. G. D. Cohen, *Phys. Rev. E* **79**, 030103(R) (2009).
[35] Y. Utsumi, D. S. Golubev, M. Marthaler, Gerd Schon, and Kensuke Kobayashi, *Phys. Rev. B* **86**, 075420 (2012).
[36] K. Kanazawa, T. Sagawa and H. Hayakawa, *Phys. Rev. Lett.* **108**, 210601 (2012).
[37] J. Casas-Vazquez and D. Jou, *Rep. Prog. Phys.* **66**, 1937 (2003).
[38] S. Sasa and H. Tasaki, *J. Stat. Phys.* **125**, 125 (2006).
[39] T. Hatano and D. Jou, *Phys. Rev. E* **67**, 026121 (2003).
[40] P. Pradhan, C. P. Amann, and U. Seifert, *Phys. Rev. Lett.* **105**, 150601 (2010).
[41] P. Pradhan, R. Ramsperger, and U. Seifert, *Phys. Rev. E* **84**, 041104 (2011).
[42] H. Touchette, *Phys. Rep.* **478**, 1 (2009).
[43] F. van Wijland, *Phys. Rev. E* **74**, 063101 (2006).
[44] See supplement material for details.
[45] P. Hänggi, *Z. Physik. B.* **31**, 407 (1978).
[46] C. Gardiner, *Stochastic Methods* (Springer-Verlag, Berlin, 2009), 4th ed.
[47] K. Itô, *Stochastic Processes: Lectures Given at Aarhus University* (Springer-Verlag, Berlin, 2004).